



Resilient[®] **ALIGN**[®]

COMMERCIAL PACKET





Resilient[®] ALIGN[®]

Permanent Non-Tack PSA Mounting Board



FEATURES & BENEFITS:

- Slidable non-tack, pressure-activated adhesive surface
- Air-Release Technology – eliminates air entrapment
- Closed cell construction – provides smoothest surface for mounting
- Velvet true black core – visually pleasing edge is ready to display with no further treatment.
- Spring-Back technology – Dent resistant eliminating damage in shipping and handling.
- Mount with a squeegee or rubber roller
- 27% Lighter weight – ease of installation, reduced shipping costs.
- Superior cutability – cuts with most commercial cutting equipment.
- Moisture Resistant
- Long-term lay flatness and stability



MADE IN USA

CORE COLOR:

Black

GAUGES:

1/2", 3/4"

SHEET SIZE:

*5"X5", 5"X7", 8"X8", 8"X10",
8.5"X11", 11"X14", 13"X19",
12"X12", 16"X20", 50" x 87"*

Additional sizes available





Resilient[®] ALIGN[®]

Permanent Non-Tack PSA Mounting Board



RESILIENT [®] ALIGN [™]	Competitor Board
Slidable non-tack, pressure activated adhesive surface	Non-repositionable
Air-Release Technology – eliminates air entrapment	Bubbles caused by air entrapment
Closed cell construction – provides a smooth surface for mounting and printing.	Inferior printing surface
Velvet black core – visually pleasing edge is ready to display without edge banding.	Edges require band treatment; added time and expense
True black color – elegant, classy appearance	Not true black
Spring-Back technology - returns to its original form after impact.	Subject to dents and creases
Dent resistant corners – eliminates damage in shipping and handling.	Crushed corners
27% Lighter Weight – reduces shipping costs; can be installed easily with adhesive strips	Higher shipping cost; requires heavy-duty hardware for installation
Superior cutability – cuts with most commercial cutting equipment.	Pulling and tearing
Moisture Resistant – not affected by humidity or condensation	Subject to delaminating in humidity
Long-term lay flatness and stability	Subject to bowing

CORE COLOR: Black


SHEET SIZE: 5"X5", 5"X7", 8"X8", 8"X10", 8.5"X11", 11"X14", 13"X19", 12"X12", 16"X20", 50" x 87"

GAUGES: 1/2", 3/4"

Additional sizes available



RESILIENT® ALIGN® APPLICATION POSSIBILITIES

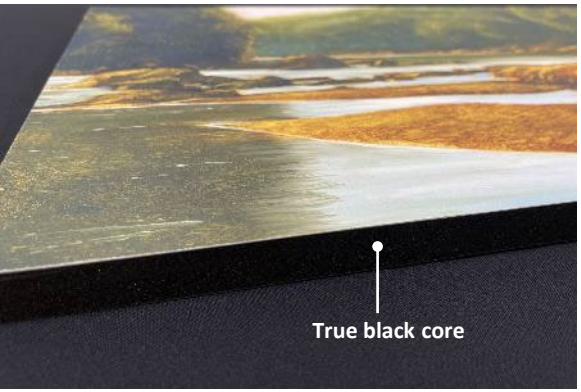





True black core





Moisture Resistant



RESILIENT® ALIGN® COMPETITOR COMPARISON

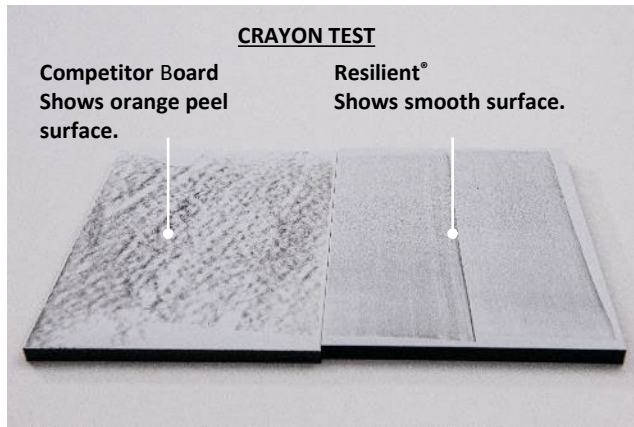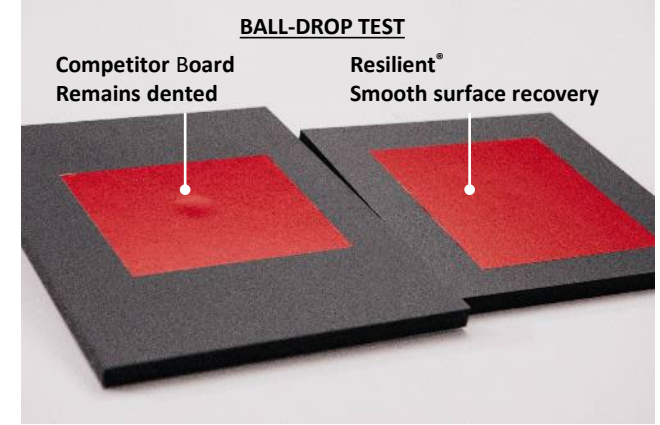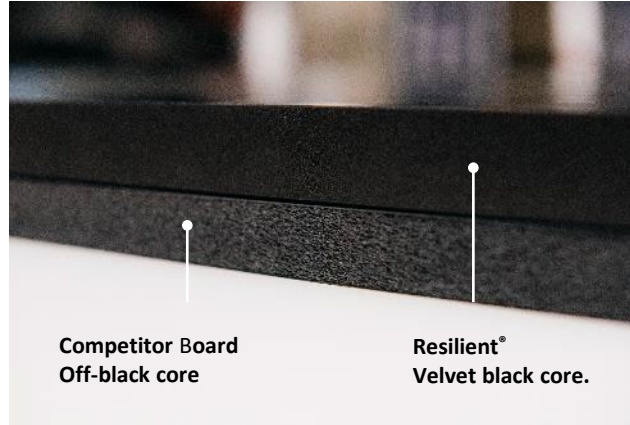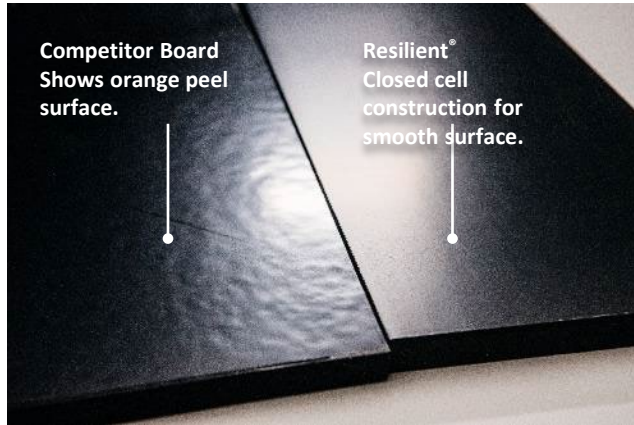

Dare to Compare!

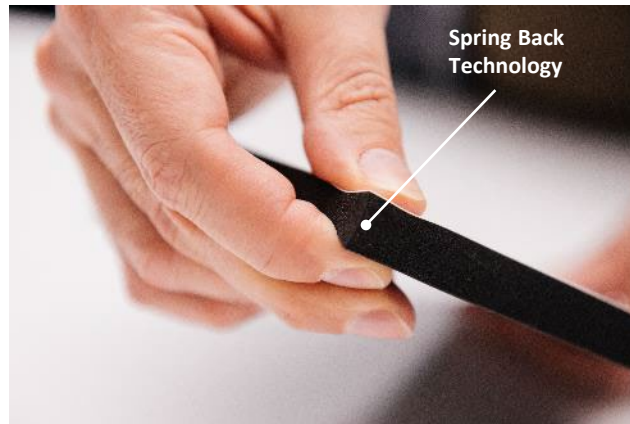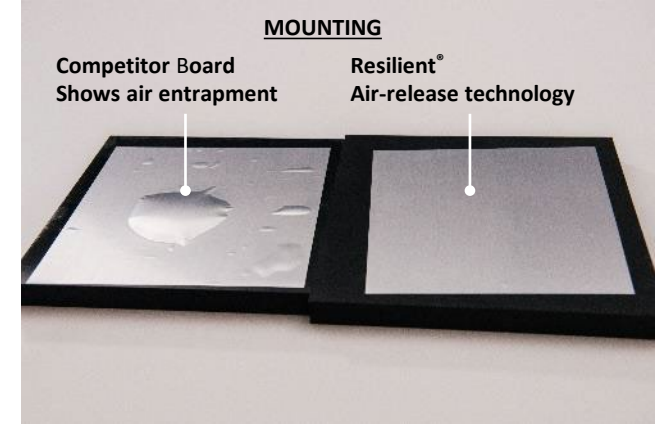



WEBSITE SCREENSHOT

Resilient® ALIGN™ Perm. Non-Tack PSA Mounting Board (Patent Pending)

BENEFITS:

- Slidable non-tack, pressure-activated adhesive surface
- Air-Release Technology – eliminates air entrapment
- Closed cell construction – provides smoothest surface for mounting
- Velvet true black core – visually pleasing edge is ready to display with no further treatment.
- Spring-Back technology – Dent resistant eliminating damage in shipping and handling.
- Mount with a squeegee or rubber roller
- 27% Lighter weight – ease of installation, reduced shipping costs.
- Superior cutability – cuts with most commercial cutting equipment.
- Moisture Resistant
- Long-term lay flatness and stability

IDEAL FOR:

- Wall Decor
- Photo Mounting

DOWNLOAD RESOURCES:

[Resilient Align Sell Sheet](#)




[Resilient Align Commercial Packet](#)

[Resilient FAQ](#)

[Resilient Align Cutting Guidelines - ZUND](#)

[Resilient Align Cutting Guidelines - KONGSBURG](#)

[Resilient Align Cutting Guidelines - COLEX](#)

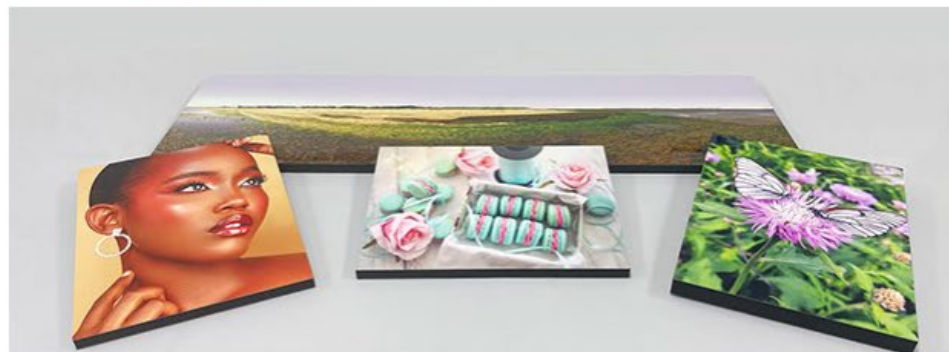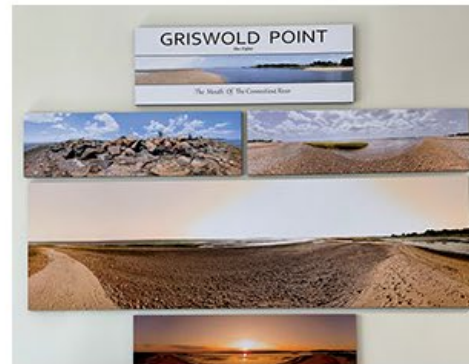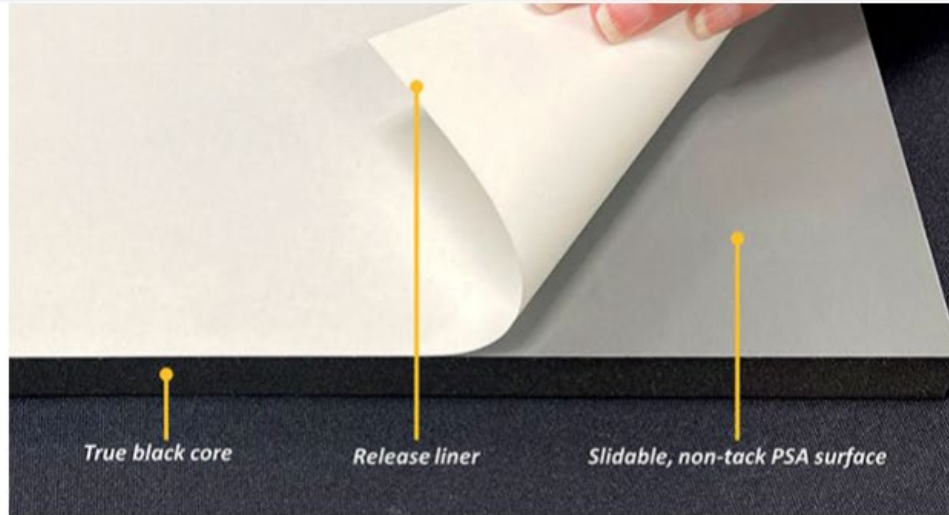

Resilient® ALIGN™ is a velvety soft, closed cell foam mounting board with a unique slidable non-tack, pressure-activated adhesive surface



CORE COLOR:
Black

GAUGES:
1/2", 3/4"

SHEET SIZE:
50" x 87"

Custom Sizes Available



RESILIENT® ALIGN® CUTTING GUIDELINES
ZUND

THICKNESS	TYPE OF CUT	TOOL	BLADE	SPEED, TOOL LOWERED	ACCELERATION, TOOL LOWERED	SPEED, LOWERING TOOL	ACCELERATION
.5"	Straight/Contour	EOT-250	Z-22	4 to 8 in./sec.		.9 in./s.	
.5"	Angle Cut	VCT-1 V-Cut	Z-73	20 to 40 in./sec.			
.75"	Straight/Contour	EOT-250	Z-23	4 to 8 in./sec.		.9 in./s.	
1"	Straight/Contour	EOT-250	Z-29	4 to 8 in./sec.	1	.9 in./s.	1
1.5"	Straight/Contour	EOT-250	Z-64	4 to 8 in./sec.	1	.9 in./s.	1

EOT (Electric Oscillating Tool)
VCT (V-Cutting Tool)



RESILIENT® ALIGN® CUTTING GUIDELINES
Kongsberg PCS

THICKNESS	TYPE OF CUT	TOOL	BLADE	X, Y SPEED	Z SPEED	ACCELERATION
1/2"	Straight	HD Knife 30	BLD-TZ230	max 4000 in/min	max	max
1/2"	Straight	VariAngle	BLD-SF640	max 4000 in/min	max	max
1/2"	V-Cut	V-NOTCH KNIFE 45 degrees	BLD-TZ511	500 in/min	120 in/min	max
1/2"	V-Cut	VariAngle	BLD-SF640	1000 in/min	120 in/min	max
1/2"	Contour	MP HF Vibracut	BLD-SR6315	500 in/min	max	max
3/4"	Straight	HD Knife 30	BLD-TZ230	max 4000 in/min	max	max
3/4"	Straight	VariAngle	BLD-SF640	max 4000 in/min	max	max
3/4"	V-Cut	VariAngle	BLD-SF640	1000 in/min	120 in/min	max
3/4"	Contour	MP HF Vibracut	BLD-SR6311	500 in/min	120 in/min	max
1"	Straight	HD Knife 30	BLD-TZ230	max 4000 in/min	max	max
1"	Straight	VariAngle	BLD-SF640	max 4000 in/min	max	max
1"	V-Cut	VariAngle	BLD-SF640	1000 in/min	120 in/min	max
1"	Contour	MP HF Vibracut	BLD-SR6311	500 in/min	12	max



RESILIENT® ALIGN® CUTTING GUIDELINES

Colex

THICKNESS	TYPE OF CUT	TOOL	BLADE	X, Y SPEED	Z SPEED	ACCELERATION
1/2"	Contour, Straight	Oscillating Tool- T00126	T00421	40-50 in/min	max	50%
3/4"	Contour, Straight	Oscillating Tool- T00126	T00425	40-50 in/min	max	50%
1"	Contour, Straight	Oscillating Tool- T00126	T00428	30-40 in/min	max	50%



Resilient[®] ALIGN[®]

Permanent Non-Tack PSA Mounting Board

Resilient[®] ALIGN's closed cell construction provides a super smooth foundation for photo mounting!

Mounting Instructions

Application is quick and easy with simple peel and stick activation. Resilient[®] Align may be used manually with a squeegee or soft rubber roller.



1. Peel off release liner.




2. Position board against squaring tool.



3. Slide and align photo.



4.(a) Adhere photo with squeegee...

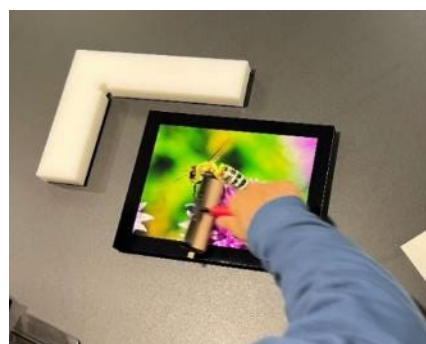

4.(b) ...or soft rubber roller.



5. Finished photo tile

Resilient[®] **ALIGN**[®]

